


# Cobra Category 5e+

CMR/CMP

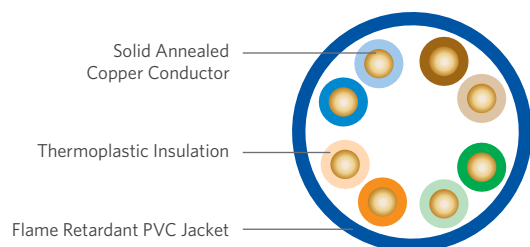

## SPECIFICATIONS

Pair Count	4
Conductor	Solid annealed copper
AWG (mm)	24 (0.51)
Insulation	CMR: Polyolefin CMP: FEP
Insulation Colors	Pair 1: ColorTip Light Blue, Blue Pair 2: ColorTip Light Orange, Orange Pair 3: ColorTip Light Green, Green Pair 4: ColorTip Light Brown, Brown
Jacket	CMR: Flame retardant (FR) PVC CMP: FR, low smoke PVC
Characteristic Impedance Ohms	100 ± 15
Nominal Velocity of Propagation %	CMR: 70 CMP: 73
Performance Compliance	UL 444 CSA C22.2 No. 214-08 UL 1666 NFPA 262 ANSI/TIA-568-C.2 ANSI/ICEA S-90-661-2012 Article 800, NEC (NFPA 70)
NRTL Programs	UL Verified CAT 5e UL, c(UL) Listed CMR UL, c(UL) Listed CMP
Sustainability	UL Certified EPD HPD Multi-Attribute Certification USGBC® Member RoHS-compliant/RoHS 2-compliant REACH-compliant

## PRODUCT DESCRIPTION



**FIRST MANUFACTURER IN THE INDUSTRY**  
to offer products that contribute toward LEED!

Cobra Category 5e+ cable is the performance leader in its class. Cobra cable is ideal for installations that require true “future proofing” in channel performance. By design, Cobra cables are manufactured to the highest quality standards, design requirements and materials to ensure that every box provides significant margin over ANSI/TIA-568-C.2 specifications for NEXT, Power Sum NEXT and Insertion Loss.

## APPLICATIONS

- 10BASE-T through 100BASE-T Ethernet
- Power over Ethernet (PoE) - IEEE 802.3af
- PoE+ - IEEE 802.3at Type 1 and 2
- ATM and token ring

## FEATURES

- UL Certified Environmental Product Declaration (EPD)
- Health Product Declaration™ (HPD™)
- Multi-Attribute Certification by GreenCircle Certified, LLC
- Guaranteed NEXT of 3 dB greater than ANSI/TIA-568-C.2 specification across frequency range
- Guaranteed ACR of 19.5 dB at 100 MHz
- Exceptional PSNEXT, PSELFEXT and PSACR over CAT 5e
- “WideMouth” POP™ Box design
- CableID® alpha numeric code printed every 2 feet
- QuickCount® marking system in feet and meters
- ColorTip® circuit identification system
- Color coded box labels

## BENEFITS

- Contributes toward 1 LEED point under the Material and Resources credit (MRC)
- Contributes toward 1 LEED point under the MRC
- Offers an overview of the sustainability of a product, its packaging and manufacturing
- Greater assurance of exceptional overall channel performance
- Performance assurance for multiple high-bandwidth applications
- Reduces BER, improving network efficiency
- Reduces tension on wire to ensure proper electrical performance after installation
- Allows both ends of a cable run to be easily identifiable without the need to separately label or tone the cable
- Provides remaining length of cable on reel
- Easily identifiable conductor mates even in low-light environments
- Easily identifies jacket colors

## PART NUMBERS AND PHYSICAL CHARACTERISTICS

Listing	Part Number <sup>1</sup>	Nominal Diameter in (mm)	Approx. Weight lbs./kft (kg./km)	Package	Packages per Pallet
CMR	52-200-x5	0.19 (4.8)	19 (28)	1,000' Reel-in-a-Box	45
CMR	52-240-x5	0.19 (4.8)	19 (28)	1,000' POP box	36
CMP	52-200-x8	0.19 (4.8)	19 (28)	1,000' Reel-in-a-Box	45
CMP	52-241-x8	0.19 (4.8)	19 (28)	1,000' POP box	36

## JACKET COLORS

<sup>1</sup>Replace “x” with: Blue = 2 Gray = 3 White = 4 Green = 5 Yellow = 6 Purple = 7 Red = 9 Brown = B Orange = D Black = E

**ELECTRICAL SPECIFICATIONS**

Frequency MHz	Insertion Loss @ 20°C Maximum dB/100 m			NEXT Minimum dB/100 m			ACR Minimum dB/100 m			PSNEXT Minimum dB/100 m		
	TIA-568-C.2	Superior Essex		TIA-568-C.2	Superior Essex		TIA-568-C.2	Superior Essex		TIA-568-C.2	Superior Essex	
	Specified	Guaranteed	Typical	Specified	Guaranteed	Typical	Calculated	Guaranteed	Typical	Specified	Guaranteed	Typical
1	2.0	2.0	1.8	65.3	68.3	79.5	63.3	67.4	77.7	62.3	66.3	77.2
4	4.1	4.0	3.6	56.3	59.3	69.9	52.2	56.4	66.4	53.3	57.3	67.5
8	5.8	5.7	5.1	51.8	54.8	65.1	46.0	50.3	60.0	48.8	52.8	62.7
10	6.5	6.4	5.8	50.3	53.3	63.6	43.8	48.2	57.9	47.3	51.3	61.2
16	8.2	8.1	7.4	47.2	50.3	60.4	39.0	43.4	53.1	44.2	48.3	58.0
20	9.3	9.2	8.3	45.8	48.8	59.0	36.5	41.0	50.9	42.8	46.8	56.6
25	10.4	10.3	9.3	44.3	47.3	57.5	33.9	38.5	48.3	41.3	45.3	55.1
31.25	11.7	11.6	10.4	42.9	45.9	56.0	31.2	35.8	45.7	39.9	43.9	53.5
62.5	17.0	16.8	14.9	38.4	41.4	51.7	21.4	26.2	36.8	35.4	39.4	49.2
100	22.0	21.7	19.1	35.3	38.3	48.5	13.3	21.0	29.5	32.3	36.3	46.0
155		27.7	24.2		35.5	45.7		9.3	21.6		33.5	43.1
200		32.1	27.8		29.8	43.6		3.5	16.0		27.8	41.0
250		36.5	31.4		28.3	42.0			10.7		26.3	39.4
300		40.5	34.7		27.2	40.4			5.9		25.2	37.9
350		44.4	37.7		26.2	39.3			1.7		24.2	36.8

Frequency MHz	PSACR Minimum dB/100 m			Return Loss Minimum dB/100 m			ELFEXT Minimum dB/100 m			PSELFEXT Minimum dB/100 m		
	TIA-568-C.2	Superior Essex		TIA-568-C.2	Superior Essex		TIA-568-C.2	Superior Essex		TIA-568-C.2	Superior Essex	
	Calculated	Guaranteed	Typical	Specified	Guaranteed	Typical	Specified	Guaranteed	Typical	Specified	Guaranteed	Typical
1	60.3	64.4	75.4	20.0	20.0	28.5	63.8	63.8	72.6	60.8	60.8	70.8
4	49.2	53.4	64.0	23.0	23.0	35.6	51.8	51.7	60.7	48.8	48.8	59.0
8	43.0	47.3	57.7	24.5	24.5	35.7	45.7	45.7	54.8	42.7	42.7	53.1
10	40.8	45.2	55.6	25.0	25.0	35.9	43.8	43.8	52.9	40.8	40.8	51.1
16	36.0	40.4	50.8	25.0	25.0	35.2	39.7	39.7	48.9	36.7	36.7	47.1
20	33.5	38.0	48.6	25.0	25.0	34.9	37.8	37.7	47.0	34.8	34.8	45.2
25	30.9	35.5	46.0	24.3	24.3	35.3	35.8	35.8	45.1	32.8	32.8	43.3
31.25	28.2	32.8	43.4	23.6	23.6	34.8	33.9	33.9	43.2	30.9	30.9	41.3
62.5	18.4	23.2	34.6	21.5	21.5	31.8	27.9	27.8	37.2	24.9	24.9	35.2
100	10.3	18.0	27.3	20.1	20.1	30.1	23.8	23.8	33.2	20.8	20.8	31.1
155		6.3	19.4		18.8	28.4		19.9	29.3		16.9	27.2
200		0.5	13.9		18.0	27.3		11.7	27.1		10.7	25.0
250			8.6		17.3	26.1		9.8	25.1		8.8	23.1
300			3.8		16.8	25.1		8.2	23.7		7.2	21.5
350					16.3	24.0		6.9	22.5		5.9	20.3

**SUSTAINABILITY LEADERSHIP**



UL and the related logo are registered trademarks of UL LLC. Health Product Declaration, HPD and the related logo are trademarks of Health Product Declaration Collaborative. GreenCircle Certified logo is a registered trademark of GreenCircle Certified, LLC. USGBC and the related logo are registered trademarks of U.S. Green Building Council.